


COMPACTA DYNAMIC S

Compacta Dynamic S offers the possibility to produce a wide range of products such as blocks, infill blocks, kerb stones, pavers and other precast concrete elements.





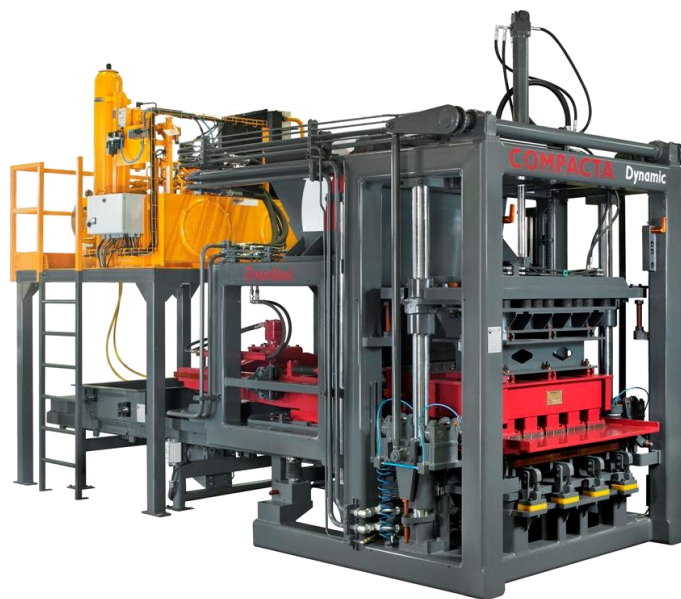


The press Dynamic S can be incorporated into various production circuits, depending of the automatization level required. This can provide a customised solution for each customer.



P/C = pieces/cycle
piezas/ciclo
pièces/cycle

T = time
tiempo
temps

P/H = pieces/hour
piezas/hora
pièces/heure

Pallet Bandeja Planchette		1.200 x 750			1.400 x 750	
Production surface Superficie de producción Surface de production		1.100 x 700			1.300 x 700	
		T	P/C	P/H	P/C	P/H
	10x20x6 cm	12"	30	8.999 (179m²)	36	10.798 (214m²)
	10x20x6 cm Face mix / B/Capa / Bi-couche	17"	30	6.352 (126m²)	36	7.625 (145m²)
	12/15x25x100 cm	15"	3	719	3	719
	12/15x25x100 cm Face mix / B/Capa / Bi-couche	20"	3	540	3	540
	20x20x40 cm 19x19x39 cm	14"	7,5	1.928	9	2.313
	15x20x40 cm 14x19x39 cm	15"	9	2.160	12	2.880
	20x20x62 cm	16"	5	1.124	6	1.348

Productions based on Press performance at 100%
Producciones basadas en un rendimiento Prensa al 100%
Productions basées sur un rendement Presse au 100%

TECHNICAL DETAILS:

- Production pallets: 1400x750 mm max, 1200x600 mm min.
- Manufacturing height:: min 40 mm / max 350 mm.
- 2 motors VTD vibration system with mechanical synchronisation of the masses.
- Vibrator strength: 0 to 15.000 daN.
- Max. frequency of the vibrator: 75 Hz.
- Total power of the press: 53 Kw.
- Manual adjustment of the product to be manufactured..
- Hydraulic/pneumatic fastening of the mould.



NEW FEATURES

- ✓ Hydraulic system with **servo-valves** technology
- ✓ **Impact vibration**

Industria 5-9
08592 Sant Martí de Centelles, ESPAÑA
Tel. 93 844 01 25
contact@prensoland.com
www.prensoland.com


Prensoland
living precast